




# Jacob.

Small **tubes** for great lighting.



**psmlighting**

100% Made in Belgium

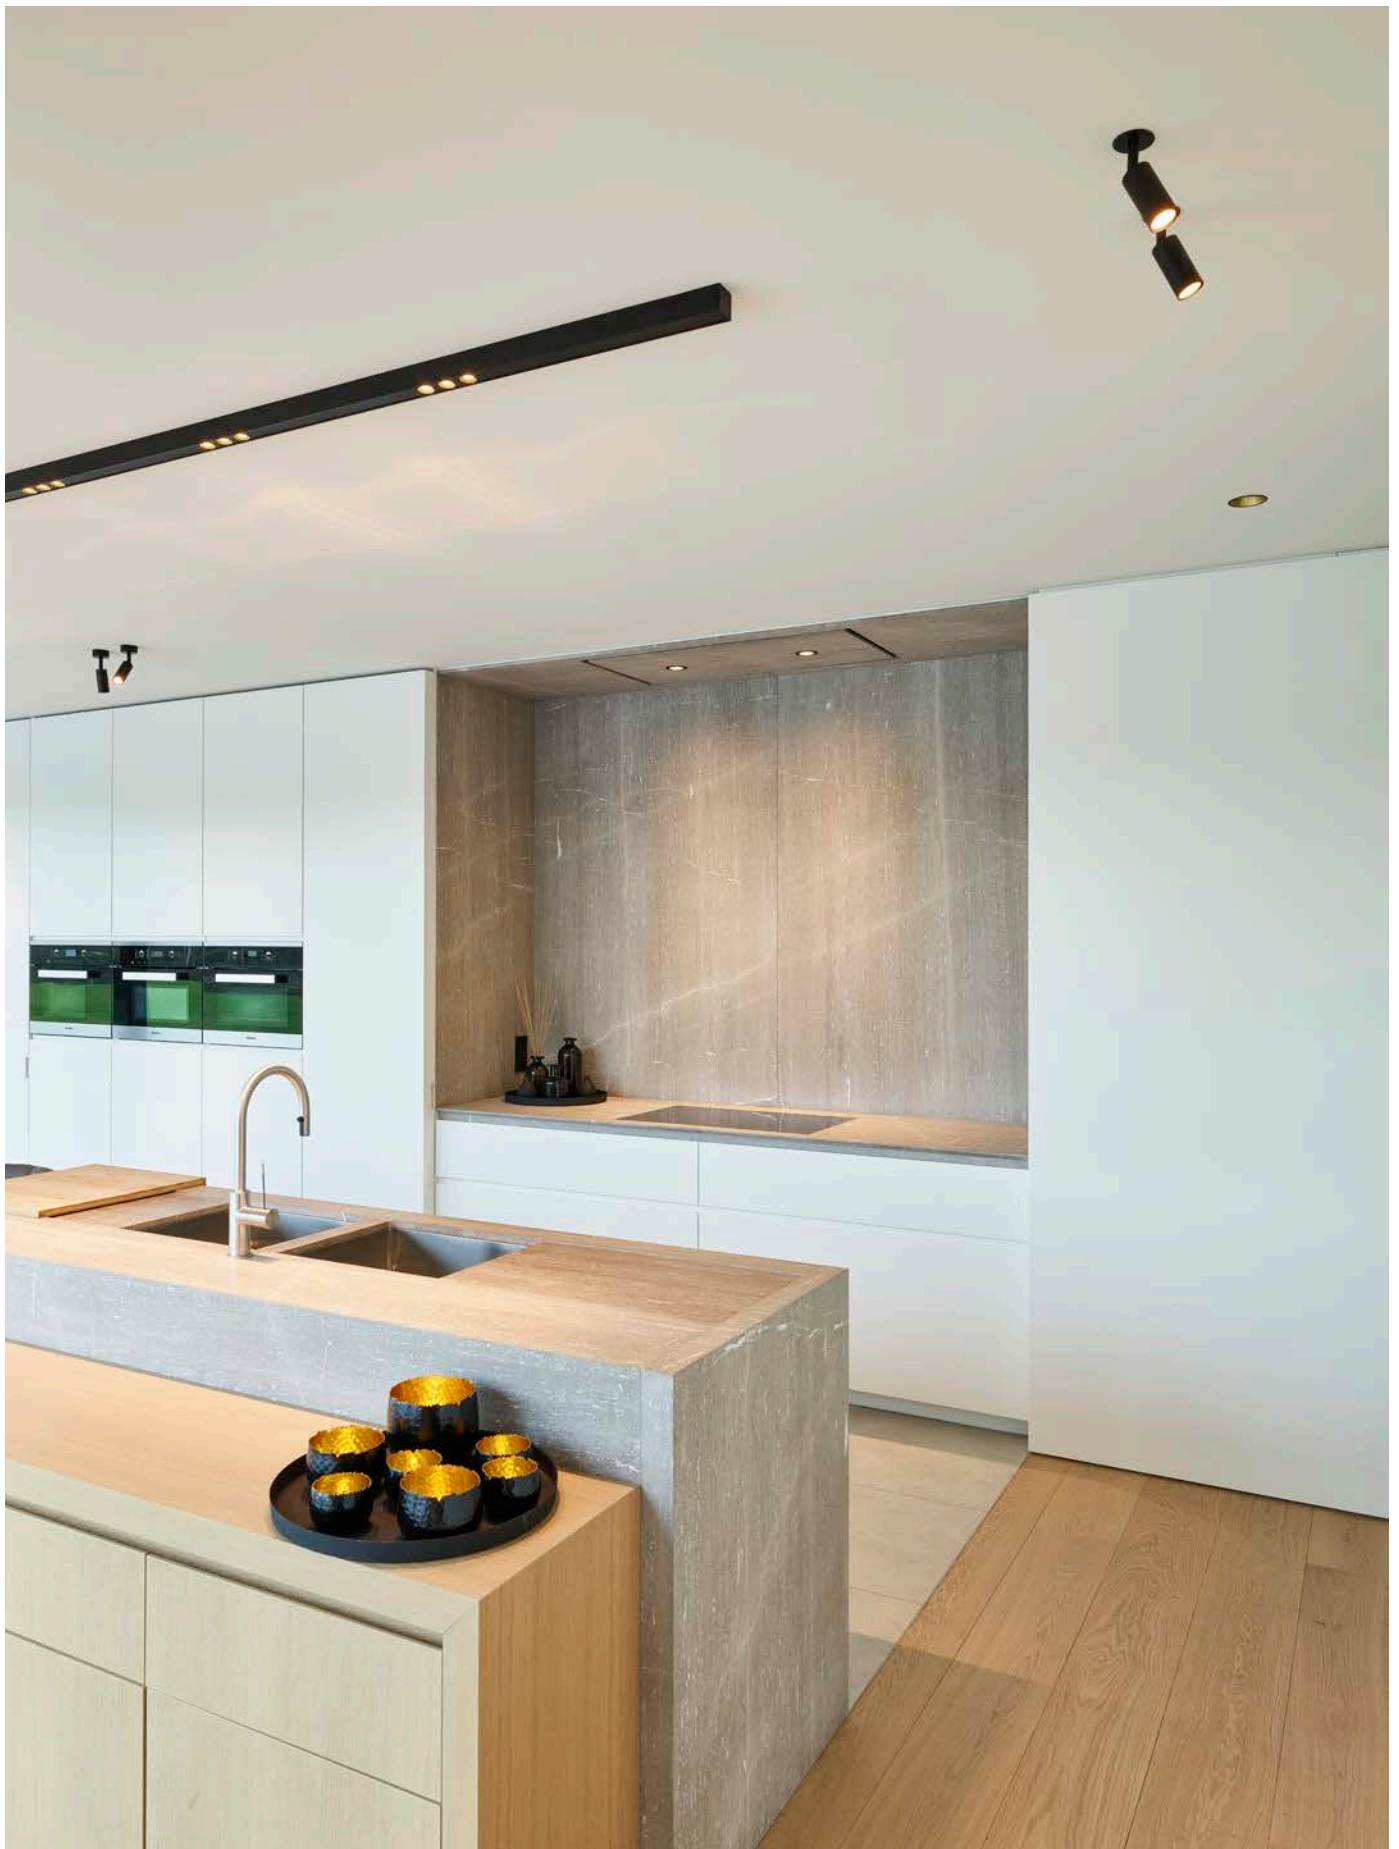

All information in this catalogue is without engagement.  
Psmighting bv reserves the right to alter materials, characteristics and dimensions without prior notice.  
Read instructions carefully. The general psmlighting sales conditions are always applicable.  
Nothing in this catalogue can be reproduced without permission in writing from the psmlighting bv company.

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

Alle M10 Aufbaustrahler und Pendelleuchten können mit Rosetten (In- & Aufbau) und Juba Basen nach Wahl kombiniert werden.

**3960.ES50.MR11/.. - JACOB**

~230V  IP20   0,1700 0,5 m 05.20.02 



built-up spot M10 - round - directional  
Aufbaustrahler M10 - rund - schwenkbar

**Lamp type**

1x QPAR35 GU10 max. 4W 230V

**Dimensions**

Ø40xH130  
Head - Ø40xH85

**Materials**

aluminium 14 | 1M | 2M

**Ref**

3960.ES50.MR11.1M	white tex
3960.ES50.MR11.2M	black tex
3960.ES50.MR11.14	alu satin

built-up


**3985M/.. - JACOB 3,8W WITH BASE**

=350mA  IP20   0,2300 0,5 m 05.20.50 




built-up spot LED M10 - round - with base 005 - without LED driver  
Aufbaustrahler LED M10 - rund - mit Basis 005 - ohne Driver LED

**Lamp type**

1x led 467lm CRI80 max. 3,8W  350mA

**Dimensions**

Ø60xH155  48° reflector  
Base - Ø60xH25  
Head - Ø40xH85

**Ref**

3985M.1M	NW   WW
3985M.2M	NW   WW
3985M.4	NW   WW
3985M.11M	NW   WW
3985M.14	NW   WW
3985M.16	NW   WW
3985M.29	NW   WW
3985M.49	NW   WW

built-up

**3981.SLE/.. - JACOB - M10**

=350mA  IP20   0,5 m 05.20.50 



built-up spot LED M10 - round - directional - without LED driver  
Aufbaustrahler LED M10 - rund - schwenkbar - ohne Driver LED

**Ref**

3981.SLE.1M	NW   WW
3981.SLE.2M	NW   WW
3981.SLE.4	NW   WW
3981.SLE.11M	NW   WW
3981.SLE.14	NW   WW
3981.SLE.16	NW   WW
3981.SLE.29	NW   WW
3981.SLE.47	NW   WW
3981.SLE.77	NW   WW

built-up



# INDOOR | Ceiling UP | Spots | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

Alle M10 Aufbaustrahler und Pendelleuchten können mit Rosetten (In- & Aufbau) und Juba Basen nach Wahl kombiniert werden.

## 3986M/.. - JACOB M - M10

=350mA



built-up spot LED M10 - round - directional - without LED driver  
Aufbaustrahler LED M10 - rund - schwenkbar - ohne Driver LED

### Lamp type

1x led 467lm CRI80 max. 3,8W A - A 350mA

### Dimensions

Ø40xH130 48° reflector

Head - Ø40xH85

### Options

TR89800255 - DRIVER

### Ref cat (STD)

3986M.1M	NW   WW
3986M.2M	NW   WW
3986M.4	NW   WW
3986M.11M	NW   WW
3986M.14	NW   WW
3986M.16	NW   WW
3986M.29	NW   WW
3986M.47	NW   WW
3986M.77	NW   WW

built-up

## 3986M.100/.. - JACOB M - M10

=350mA



built-up spot LED M10 - round - directional - without LED driver  
Aufbaustrahler LED M10 - rund - schwenkbar - ohne Driver LED

### Lamp type

1x led 467lm CRI80 max. 3,8W A - A 350mA

### Dimensions

Ø40xH230 48° reflector - Bar 100

Head - Ø40xH85

### Options

TR89800255 - DRIVER

### Ref cat (STD)

3986M.100.1M	NW   WW
3986M.100.2M	NW   WW
3986M.100.14	NW   WW

built-up

## 3986M.300/.. - JACOB M - M10

=350mA



built-up spot LED M10 - round - directional - without LED driver  
Aufbaustrahler LED M10 - rund - schwenkbar - ohne Driver LED

### Lamp type

1x led 467lm CRI80 max. 3,8W A - A 350mA

### Dimensions

Ø40xH430 48° reflector - Bar 300

Head - Ø40xH85

### Options

TR89800255 - DRIVER

### Ref cat (STD)

3986M.300.1M	NW   WW
3986M.300.2M	NW   WW
3986M.300.14	NW   WW

built-up

## 3982M/.. - JACOB M - M10

=500mA



built-up spot LED M10 - round - directional - without LED driver  
Aufbaustrahler LED M10 - rund - schwenkbar - ohne Driver LED

### Lamp type

1x led 595lm CRI90 max. 5,8W A - A 500mA

### Dimensions

Ø40xH130 48° reflector

Head - Ø40xH85

### Options

89800255 - DRIVER

### Ref

3982M.1M	NW   WW
3982M.2M	NW   WW
3982M.14	NW   WW
3982M.16	NW   WW
3982M.29	NW   WW
3982M.46	NW   WW
3982M.49	NW   WW
3982M.64	NW   WW

built-up







3983.200/.. - JACOB

~230V   IP20     



built-up ceiling light - round - fixed - down - with LED driver  
 Aufbau Deckenleuchte - rund - fest - down - mit Driver LED

**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 Ø40xH200 

Ref	
3983.200.1M	NW   WW
3983.200.2M	NW   WW
3983.200.16	NW   WW
3983.200.29	NW   WW
3983.200.45	NW   WW



built-up

3983.300/.. - JACOB

~230V   IP20     



built-up ceiling light - round - fixed - down - with LED driver  
 Aufbau Deckenleuchte - rund - fest - down - mit Driver LED

**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 Ø40xH300 

Ref	
3983.300.1M	NW   WW
3983.300.2M	NW   WW
3983.300.16	NW   WW
3983.300.29	NW   WW
3983.300.45	NW   WW



built-up

3983.400/.. - JACOB

~230V   IP20     



built-up ceiling light - round - fixed - down - with LED driver  
 Aufbau Deckenleuchte - rund - fest - down - mit Driver LED

**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  -  350mA

**Dimensions**  
 Ø40xH400 

Ref	
3983.400.1M	NW   WW
3983.400.2M	NW   WW
3983.400.16	NW   WW
3983.400.29	NW   WW
3983.400.45	NW   WW

built-up







All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

Alle M10 Aufbaustrahler und Pendelleuchten können mit Rosetten (In- & Aufbau) und Juba Basen nach Wahl kombiniert werden.

**3987.M.B3/.. - JACOB M - B3**

=350mA



IP20



0,8 m



0,5 m



05.20.50



pendant with swivel - without LED driver  
Pendelleuchte mit Kugelgelenk - ohne Driver LED

**Lamp type**

1x led 467lm CRI80 max. 3,8W A - A 350mA

**Dimensions**

Ø40xH85 48° reflector - Bar 800

**Options**

020.B3.D8,3 - ROSETTE

**Ref**

3987.M.B3.1M	NW   WW
3987.M.B3.2M	NW   WW
3987.M.B3.14	NW   WW

built-up

**3987.M.TX/.. - JACOB M - TX**

=350mA



IP20



2 m



0,2600



0,5 m



05.20.50



pendant - with 2m textile cable and strain relief on lampholder's side - without LED driver  
Pendelleuchte - ohne Driver LED

**Lamp type**

1x led 467lm CRI80 max. 3,8W A - A 350mA

**Dimensions**

Ø40xH85 48° reflector - Cable 2000

**Options**

055B - ROSETTE for textile cable

**Ref**

3987.M.TX.1M.TX1	NW   WW
3987.M.TX.2M.TX2	NW   WW
3987.M.TX.14.TX11	NW   WW

built-up

## INDOOR | Ceiling UP | Pendants | JACOB

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

Alle M10 Aufbaustrahler und Pendelleuchten können mit Rosetten (In- & Aufbau) und Juba Basen nach Wahl kombiniert werden.

### 3988.300/.. - JACOB PENDEL - TX

=350mA



IP20



1,5 m



0,7500



0,5 m



05.20.50



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED

#### Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

#### Dimensions

Ø40xH300  $\wedge$  48° reflector - Cable 1500

#### Ref

3988.300.1M.TX1	NW   WW
3988.300.2M.TX2	NW   WW
3988.300.29.TX2	NW   WW
3988.300.49.TX1	NW   WW

built-up

### 3988.400/.. - JACOB PENDEL - TX

=350mA



IP20



1,5 m



0,8500



0,5 m



05.20.50



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED

#### Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

#### Dimensions

Ø40xH400  $\wedge$  48° reflector - Cable 1500

#### Ref

3988.400.1M.TX1	NW   WW
3988.400.2M.TX2	NW   WW
3988.400.29.TX2	NW   WW
3988.400.49.TX1	NW   WW

built-up

### 3988.500/.. - JACOB PENDEL - TX

=350mA



IP20



1,5 m



1,6000



0,5 m



05.20.50



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED

#### Lamp type

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

#### Dimensions

Ø40xH500  $\wedge$  48° reflector - Cable 1500

#### Ref

3988.500.1M.TX1	NW   WW
3988.500.2M.TX2	NW   WW
3988.500.29.TX2	NW   WW
3988.500.49.TX1	NW   WW

built-up

All M10 spotlights and pendants can be combined with bases (built-in & built-up) and Juba bases as preferred.

Alle M10 Aufbaustrahler und Pendelleuchten können mit Rosetten (In- & Aufbau) und Juba Basen nach Wahl kombiniert werden.



**3980.300/.. - JACOB BRASS - TX**

=350mA  IP20   1,5 m  0,9000  0,5 m  



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED

**Ref**  
 3980.300.16.TXM NW | WW

**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  - **350mA**

**Dimensions**  
 Ø40xH300  48° reflector - Cable 1500

built-up



**3980.400/.. - JACOB BRASS - TX**

=350mA  IP20   1,5 m  0,9700  0,5 m  



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED

**Ref**  
 3980.400.16.TXM NW | WW

**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  - **350mA**

**Dimensions**  
 Ø40xH400  48° reflector - Cable 1500

built-up



**3980.500/.. - JACOB BRASS - TX**

=350mA  IP20   1,5 m  1,5000  0,5 m  



pendant - round - with 1,5m textile cable and strain relief on lampholder's side - without LED driver  
 Pendelleuchte - rund - mit 1,5m Textilkabel und Zugentlastung an Fassung - ohne Driver LED








**Ref**  
 3980.500.16.TXM NW | WW


**Lamp type**  
 1x led 467lm CRI80 max. 3,8W  - **350mA**

**Dimensions**  
 Ø40xH500  48° reflector - Cable 1500

built-up


1922.3/.. - JACOB

~230V   IP20     

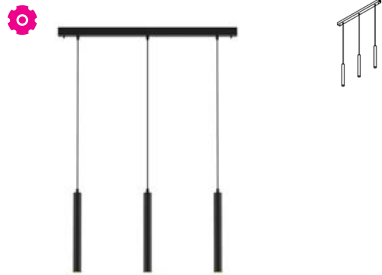

built-up

pendant - with 3x Jacob on base Juba - with LED driver  
 Pendelleuchte - mit 3x Jacob auf Basis Juba - mit Driver LED

**Lamptype**  
 3x led 639lm CRI80 max. 5,6W  -  500mA






**Dimensions**  
 L900xB45xH1945 - Cable 1500  
 Base - L900xB45xH45  
 Tube - Ø40xH400


**Materials**  
 aluminium 1M | 2M  
 brass 16

**Ref**

1922.3.1M.TX1.NW	white tex
1922.3.1M.TX1.WW	white tex
1922.3.2M.TX2.WW	black tex
1922.3.2M.TX2.NW	black tex
1922.3.16.TXM.NW	satin gold
1922.3.16.TXM.WW	satin gold
1922.3.216.TX2.NW	black - gold
1922.3.216.TX2.WW	black - gold
1922.3.216.TXM.NW	black - gold
1922.3.216.TXM.WW	black - gold

1923.5/.. - JACOB

~230V   IP20     

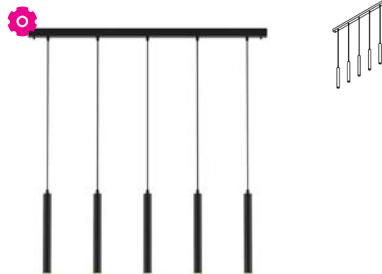

built-up

pendant - with 5x Jacob on base Juba - with LED driver  
 Pendelleuchte - mit 5x Jacob auf Basis Juba - mit Driver LED

**Lamptype**  
 5x led 639lm CRI80 max. 5,6W  -  500mA








**Dimensions**  
 L1200xB45xH1945 - Cable 1500  
 Base - L1200xB45xH45  
 Tube - Ø40xH400


**Materials**  
 aluminium 1M | 2M  
 brass 16

**Ref**

1923.5.1M.TX1.NW	white tex
1923.5.1M.TX1.WW	white tex
1923.5.2M.TX2.WW	black tex
1923.5.2M.TX2.NW	black tex
1923.5.16.TXM.NW	satin gold
1923.5.16.TXM.WW	satin gold
1923.5.216.TX2.NW	black - gold
1923.5.216.TX2.WW	black - gold
1923.5.216.TXM.NW	black - gold
1923.5.216.TXM.WW	black - gold

1924.7/.. - JACOB

~230V   IP20     

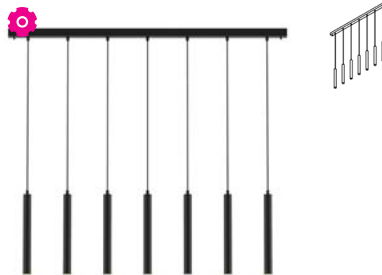

built-up

pendant - with 7x Jacob on base Juba - with LED driver  
 Pendelleuchte - mit 7x Jacob auf Basis Juba - mit Driver LED

**Lamptype**  
 7x led 639lm CRI80 max. 5,6W  -  500mA








**Dimensions**  
 L1400xB45xH1945 - Cable 1500  
 Base - L1400xB45xH45  
 Tube - Ø40xH400

**Materials**  
 aluminium 1M | 2M  
 brass 16

**Ref**

1924.7.1M.TX1.NW	white tex
1924.7.1M.TX1.WW	white tex
1924.7.2M.TX2.WW	black tex
1924.7.2M.TX2.NW	black tex
1924.7.16.TXM.NW	satin gold
1924.7.16.TXM.WW	satin gold
1924.7.216.TX2.NW	black - gold
1924.7.216.TX2.WW	black - gold
1924.7.216.TXM.NW	black - gold
1924.7.216.TXM.WW	black - gold




1925.5/.. - JACOB

~230V   IP20     




pendant - with 5x Jacob on base Rondobox - with LED driver  
 Pendelleuchte - mit 5x Jacob auf Basis Rondobox - mit Driver LED

**Lamp type**

 5x led 639lm CRI80 max. 5,6W  -  500mA

**Dimensions**

 Ø350xH1945 - Cable 1500

Base - Ø350xH28

Tube - Ø40xH400

**Materials**






aluminium 1M | 2M

**Ref**

1925.5.1M.TX1.NW	white tex
1925.5.1M.TX1.WW	white tex
1925.5.2M.TX2.NW	black tex
1925.5.2M.TX2.WW	black tex
1925.5.216.TX2.NW	black - gold
1925.5.216.TX2.WW	black - gold
1925.5.216.TXM.NW	black - gold
1925.5.216.TXM.WW	black - gold

built-up




1926.7/.. - JACOB

~230V   IP20     




pendant - with 7x Jacob on base Rondobox - with LED driver  
 Pendelleuchte - mit 7x Jacob auf Basis Rondobox - mit Driver LED

**Lamp type**

 5x led 639lm CRI80 max. 5,6W  -  500mA

**Dimensions**

 Ø400xH1945 - Cable 1500

Base - Ø400xH28

Tube - Ø40xH400

**Materials**

aluminium 1M | 2M

**Ref**

1926.7.1M.TX1.NW	white tex
1926.7.1M.TX1.WW	white tex
1926.7.2M.TX2.NW	black tex
1926.7.2M.TX2.WW	black tex
1926.7.216.TX2.NW	black - gold
1926.7.216.TX2.WW	black - gold
1926.7.216.TXM.NW	black - gold
1926.7.216.TXM.WW	black - gold

built-up



3984/.. - JACOB

~230V



IP20



built-up wall light - round - fixed - down/up - with LED driver  
Wandleuchte für Aufbau - rund - fest - down/up - mit Driver LED

Lamp type

2x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

B40xH250xD85 48° reflector

B35xH190xD35

Tube - Ø40xH250

Ref

3984.1M

NW | WW

3984.2M

NW | WW


3984.29

NW | WW

3984.49

NW | WW

built-up

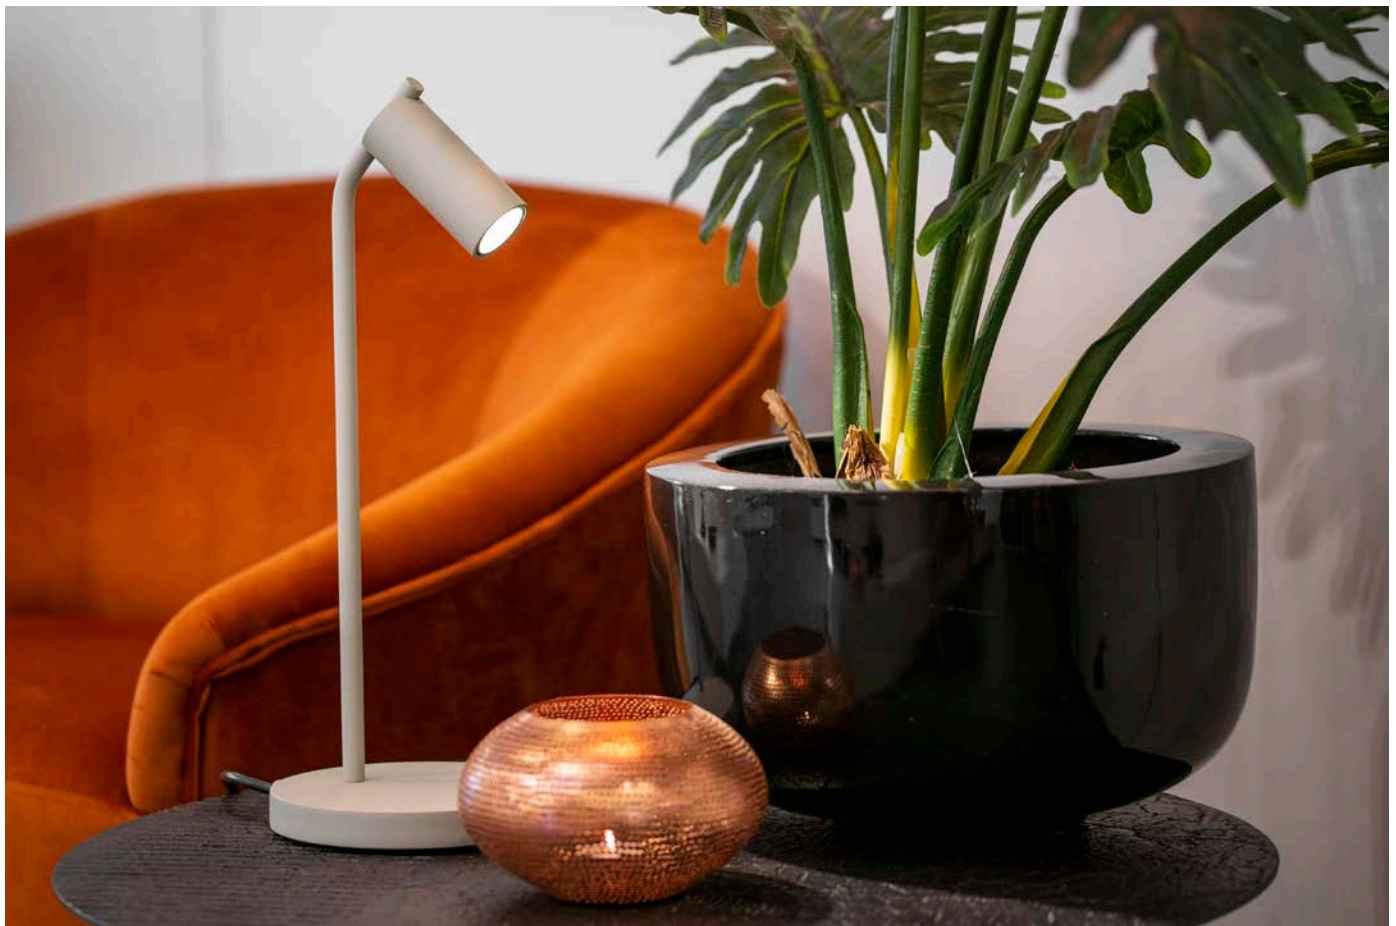

3961/.. - JACOB

=350mA



IP20



2,1000

0,5 m

05.20.50



table lamp - fixed - with cable and plug - with LED driver  
Tischleuchte - fest - mit Kabel und Stecker - mit Driver LED

Lamptype

1x led 467lm CRI80 max. 3,8W A - A+ 350mA

Dimensions

Ø160xH400

Ref

3961.1M

NW | WW

3961.2M

NW | WW


3961.29

NW | WW

3961.47

NW | WW

built-up

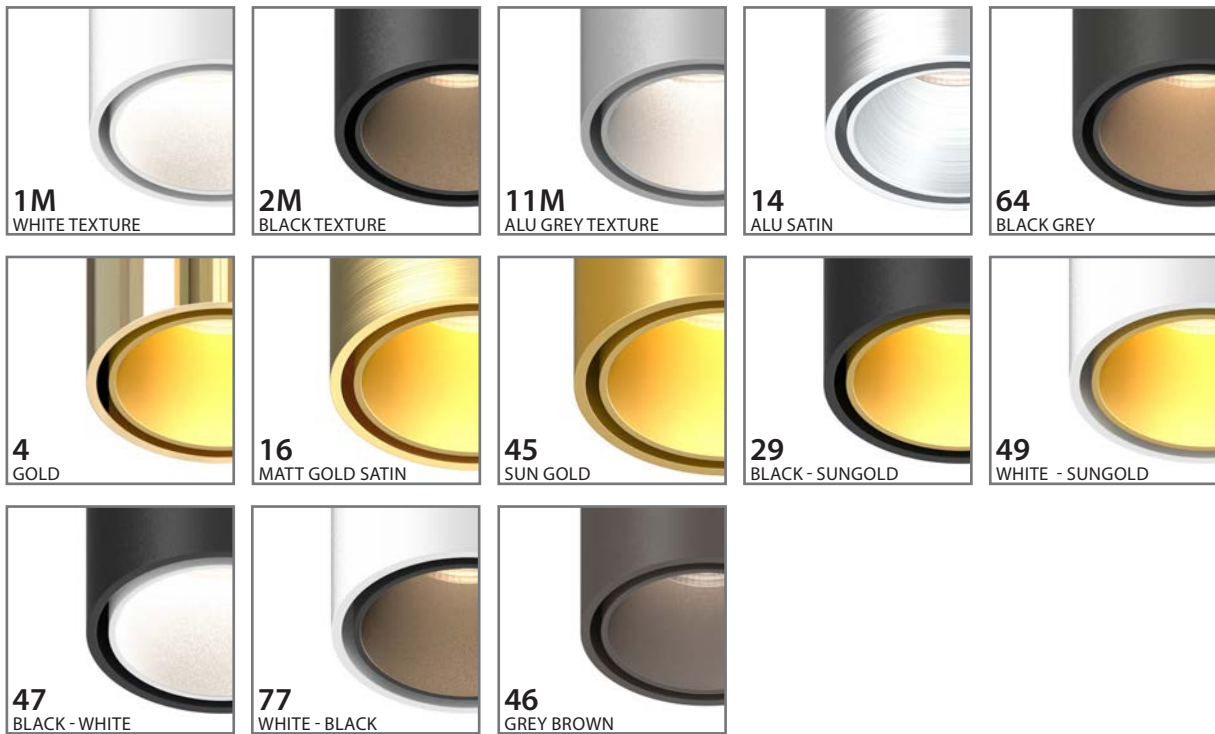

Available in more colours. Price on request.



Groendreef 60 | 9880 Aalter | Belgium | T +32 9 374 19 51 | [www.psmlighting.be](http://www.psmlighting.be)